



Water Valves : 2 / 3 motorized valves

3/4" 3 way

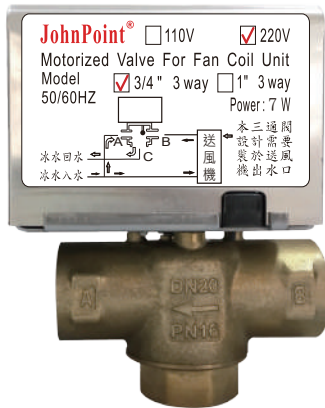

3/4" 2 way

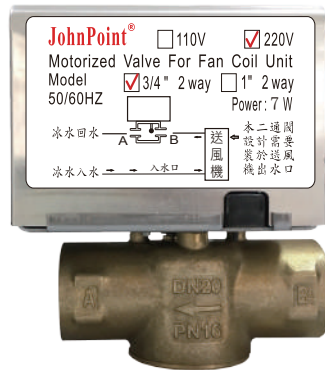

2 Way Valve : Can be used instead of 3 way valves, when chiller has a by-pass valve

Dimensions : 70 × 45 mm

- Fluid temperature <94°C, suitable for both cooling and heating systems, ambient temperature <40°C.
- Body withstands pressure of 25 kg/cm².
- Working media: ice water, hot water, brine.
- Patented super rapid cooling design.
- Dual-spring design ensures even torque distribution, eliminating water hammer or flow noise.

Copper alloy two- and three-way valve product number :

2 way valve		3 way valve	
3/4"	2P-01 (110V)	3/4"	3P-01 (110V)
	2P-02 (220V)		3P-02 (220V)
1"	2D-01 (110V)	1"	3D-01 (110V)
	2D-02 (220V)		3D-02 (220V)

Customized pipe fittings for motorized valves.

Product Features

1. Dual-spring design, never cracks.
2. Low-voltage start-up, uses ultra-durable American UL and CSA certified motors (MAMS) with special mechanisms.
3. Aluminum alloy motor chamber, all-metal fireproof (non-plastic).
4. Large ball chamber opening/closing stroke, long-lasting without water hammer noise.
5. Exclusive rapid cooling mechanism.

For use in large buildings such as offices, schools, industrial parks, MRT, HSR.