




Cannex Technology

Wireless Lavalier microphone

ISM-B1 Wireless audio receiver



Meeting



Teaching



Speech

Unique Designs

- ✓ Design in Japan. 100% assembling in Taiwan.
- ✓ With 2.4GHz digital wireless transmission.
- ✓ Superior noise filtering technology brings crystal clear speech & sound to your audience.
- ✓ Easy to connect. Effortless to use.
- ✓ With efficient and high-capacity rechargeable Li-ion battery which provides up to 9 hours usage time.
- ✓ Press to connect in 3 seconds.
- ✓ When audio input is not detected for 3 minutes, it turns itself off automatically.
- ✓ You can use the system everywhere you like, as long as there is an amplifier equipment.
- ✓ High quality. Great mobility.
- ✓ With usb connector enabled rechargeable battery, you can save the cost of batteries significantly.
- ✓ Compatible with external Full-Size Headset or Lavalier Microphone.
- ✓ Professional technology helps you to keep your voice healthy.
- ✓ Feather-weight with only 20 grams. You won't feel a thing.
- ✓ Compact, lightweight & easy to carry. A good helper for teaching, speech, performances & meeting.
- ✓ Attractive appearance with lively design.



The tiniest rechargeable microphone ever in the market.



3.5mm to 6.3mm Audio adapter



Shock & crash resistant carry case. (Personal accessory. 100 % clean and healthy.)



Protective cap ISM-B1-RX (Rechargeable)



Power adapter with USB ports



USB cable



Lavalier Microphone Chest microphone (option)



- Attentive design : The microphone comes with volume keys that you can adjust the speaker's volume directly. (25 levels)
- Feather-weight with only 20 grams. You won't feel a thing.
- Once microphone and receiver's battery is fully charged, it lasts 8 hours. More than enough for school daily use.




Significantly save the cost of battery every month


Cost of other brand's

**\$10 NTD x 4 pcs = \$40 NTD . \$40 NTD x 22 days = \$880 NTD
--- Do not save money and not environmental**

※ One receiver can be paired with one microphone ONLY. If you wish to use another microphone/receiver instead, please run the pair procedure all over again.

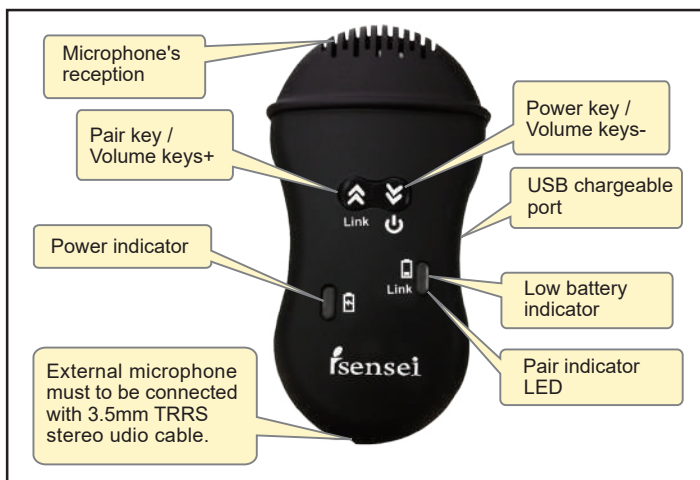

ISM-B1-TX

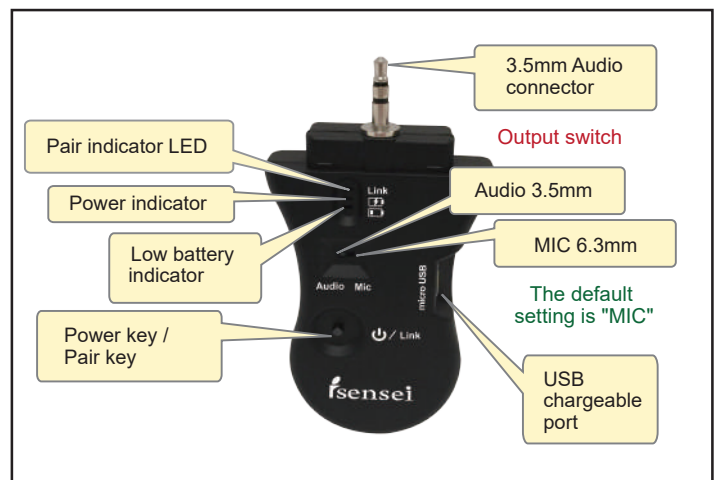

ISM-B1-RX

Wireless Lavalier microphone	
Frequency rang	2400~2483.5MHz
Transmit rate	2Mbps
Sample Rate	44.1KHz/16bit
SNR	-91db(A- Weigted)
Latency	24.67ms
Transmission Distance	>15m(typical)
Battery	3.7V/360mAH Li-Po Battery
Antenna Type	PIFA
Dimension	74mm x 42mm x 23mm
Weight	20g

Wireless audio receiver	
Power Output	25mW(16Ω)
Output	3.5mm Stereo Plug/6.3mm Plug adapter
Frequency response	20Hz~20kHz
Battery	3.7V/450mAH Li-Po Battery
Power adapter	DC 5V/1A
Dimension	94mm x 48mm x 14mm
Weight	28g



AGENT

Wireless Lavalier microphone

CCAJ15LP1950T0

Wireless audio receiver

CCAJ15LP1960T0

※ Notes : iSensei.co.jp reserves the right to change the product's specifications and functions at any time without prior notice.



CANNEX TECHNOLOGY INC.

Since 1991
Design and manufacture
/ Made in Taiwan

http://www.akr.com.tw
Tel : +886-4-861-3883(Rep) Fax: +886-4882-8209
Add : No.182, Sec.2, Yuanlu Rd., Sihu, Changhua,
51449, Taiwan

Copyright © 2015.01 Cannex Technology Inc. All rights reserved.